



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R9W


SEC 25
1/4
SEC 36

U.S.B.&M.

E-23

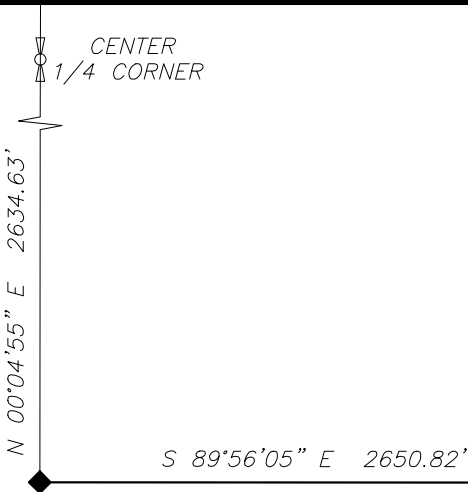

SECTION CORNER



NO SCALE

NOTE:
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED
FROM G.P.S. OBSERVATIONS AT A CONTROL POINT LOCATED
AT LAT: 40°11'44.89756"N & LONG: 110°49'41.53934"W
USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE
STATION CONTROL NETWORK MAINTAINED AND OPERATED BY
THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND 5/8" IRON ROD AT QUARTER CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE
THE ORIGINAL LOCATION OF THE CORNER

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA
(U.S. SURVEY FEET)
NAD 83 UTAH CENTRAL ZONE
N: 7236201.22
E: 1822217.31

LATITUDE: 40°11'00.35028" N
LONGITUDE: 110°50'57.42901" W
PUBLIC LAND SURVEY SYSTEM GCDB ID NO. UT300030S0090W0_640200

CERTIFICATION

I Jerry D. Allred , Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 8 FEB '16

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

